THIS DRAWING IS AN OVERALL REPRESENTATION OF THE APPARATUS AS PROPOSED.


THE EXACT DIMENSIONS, LOCATIONS OF ACCESSORIES AND/OR COMPONENTS MAY BE REVISED PENDING COMPLETE ENGINEERING OF THE CUSTOM REQUIREMENTS OF THE INDIVIDUAL APPARATUS ORDER.


IF THERE IS A DISCREPANCY BETWEEN THE BODYBUILDER PRINT AND THE WRITTEN PROPOSAL; THE SPECIFICATIONS WITHIN THE PROPOSAL PREVAIL.

This drawing along with any changes made and initialed by both the "Fire Department" & HME, Inc. represents what will be constructed and supplied to the "Fire Department." Any changes to the contract specifications and drawing after today's date will be addressed via appropriate change order signed and approved by both the "Fire Department" & HME, Inc.


APPROVED BY:_____ TITLE: _____
FIRE DEPARTMENT


APPROVED BY:_____ TITLE: _____
HME, Incorporated

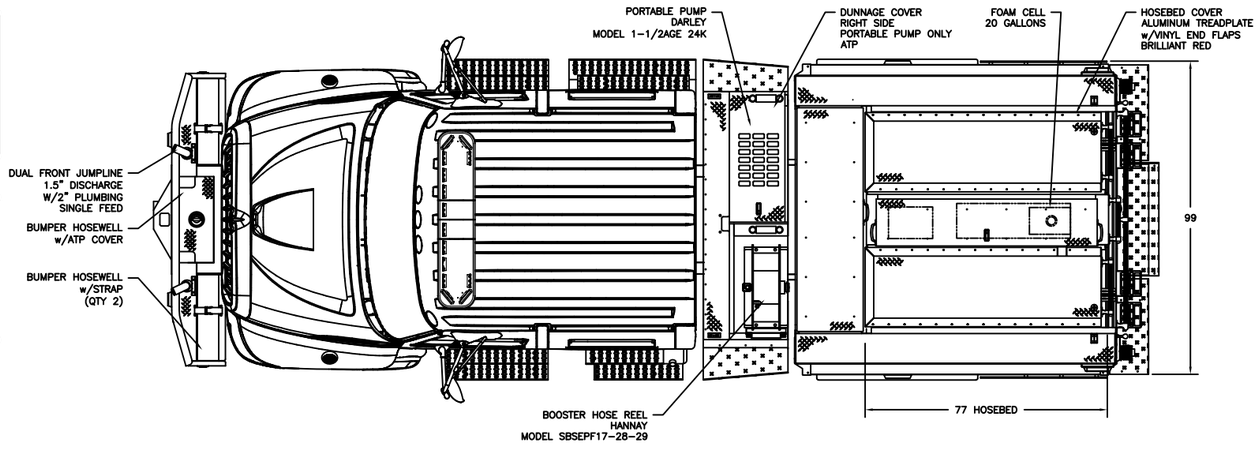





ON-BEAM
LADDER STORAGE

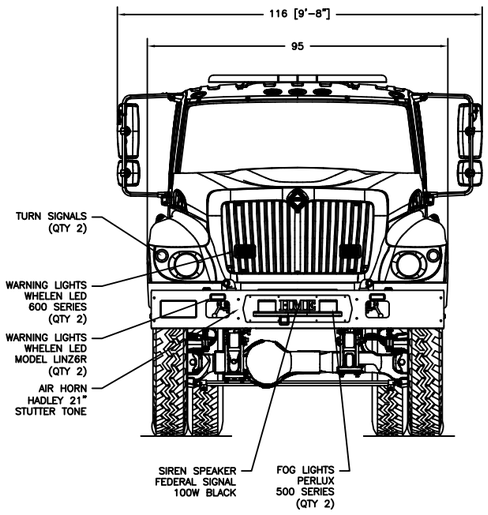

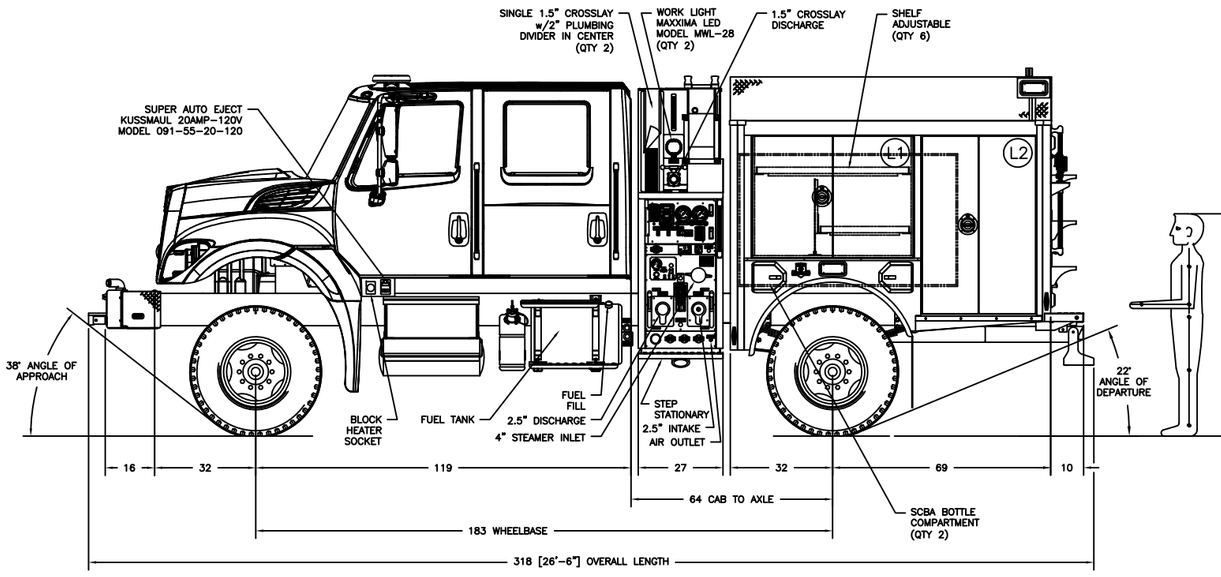

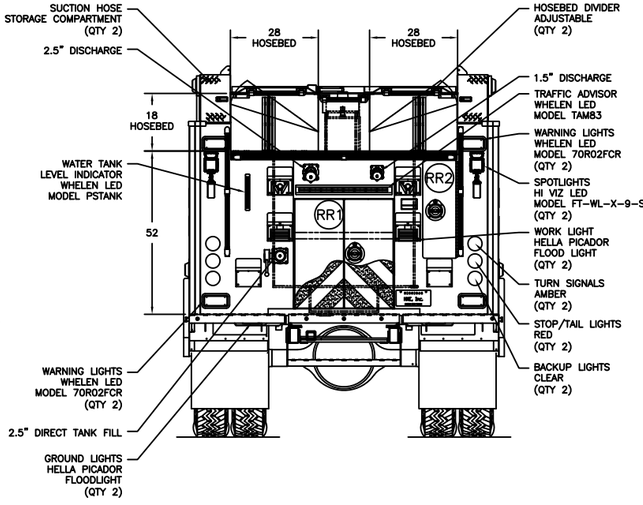

COMPARTMENTATION						
	BEHIND DOOR			CLEAR OPENING		
COMPT.	WIDTH	HEIGHT	DEPTH	DOOR WIDTH	DOOR HEIGHT	COMPT. VOLUME
L1: UPPER	51.5"	10.5"	11"	49.5"	36"	3.5 FT ^{3}
L1: LOWER	51.5"	32"	23"	34"	53"	21.9 FT^3
L2: UPPER	36"	10.5"	11"	34"	53"	2.4 FT ^{3}
L2: LOWER	36"	49.5"	23"	34"	53"	23.7 FT^3
R1:	51.5"	42.5"	11"	49.5"	36"	13.9 FT^3
R2: UPPER	36"	42.5"	11"	34"	53"	9.7 FT ^{3}
R2: LOWER	36"	17"	23"	34"	53"	8.1 FT ^{3}
CR1:	37"	13"	22.5"	31"	10"	6.2 FT ^{3}
RR1:	48"	48.5"	26.5"	30"	32"	35.7 FT^3

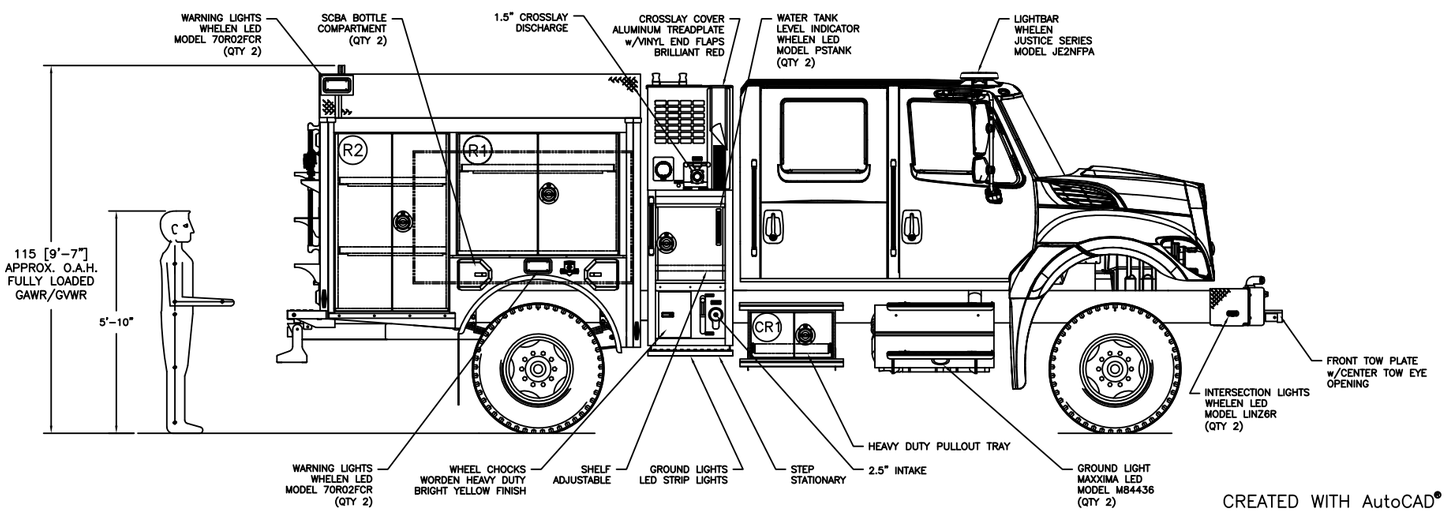

CREATED WITH AutoCAD®

LET	BY	DATE	REVISION
D	DM	25 APR '18	CLEAN ORDER RELEASE
C	DM	12 MAR '18	CHANGE ORDER
B	DM	28 FEB '18	CHANGE ORDER
A	DM	21 SEP '17	ORIGINAL RELEASE

HME INCORPORATED
1950 BYRON CENTER AVE.
WYOMING, MI. 49519

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF HME. INC.

NAME
NORTH TAHOE, CA FIRE DEPARTMENT

DRAWN	DATE	APPROVED	DRAWING FILE
D. MEAD	21 SEP '17	N/A	23119 – NORTH TAHOE, CA.DWG

THIRD ANGLE PROJECTION | SIZE B | NUMBER 23119 | SCALE NTS | SHEET 1 OF 1